


Linea H920	Technical data sheet	
	Version 12/2024	

HEATING & TECHNICAL PARAMETERS:		
energy efficiency class	A-B-C-D-E-F-G	A+
direct heat output (nominal power)	[kW]	12,8
heating power range	[kW]	5- 14
energy efficiency index	[EEI]	107,0
energy efficiency at nominal heat output	[%]	80,00
seasonal space heating energy efficiency	[%]	70,00
CO emission at 13% O ₂	[%]	0,090
	[mg/Nm ³]	1098
dust emission at 13% O ₂	[mg/Nm ³]	10
OGC at 13% O ₂	[mg/Nm ³]	113
NO _x emission at 13% O ₂	[mg/Nm ³]	104
flue gas mass flow	[g/s]	11,36
average smoke temperature at smoke outlet	[°C]	222
minimum chimney draft	[Pa]	12
DIMENSIONS & WIGHT		
total dimensions, height x width x depth	[mm]	1340x940x560
fascade dimensions, width x height	[mm]	788 x 496
front glass dimensions, width x height	[mm]	754 x 450
maximum log lenght	[cm]	55
smoke flue diameter	[mm]	230 / 240
air inlet diameter	[mm]	123
weight	[kg]	280
CERTIFICATES AND NORMS		
EN 13229	V / -	222/19 - LG
declaration of the Ecodesign requirements	V / -	V
BlmSchV level 2	V / -	V
15a BVG	V / -	
ADDITIONAL INFORMATION		
minimum cross-section of supply air grating	[cm ²]	640
minimum cross-section of outgoing air grating	[cm ²]	900
for continous burning	V / -	V
type of fuel		wood logs with moisture content ≤ 20 %
ashpan	V / -	V
appliance suitable for low energy and passive	V / -	V
door opening		up/down + side
possibility of burning with open door	V / -	V
warranty	years	5

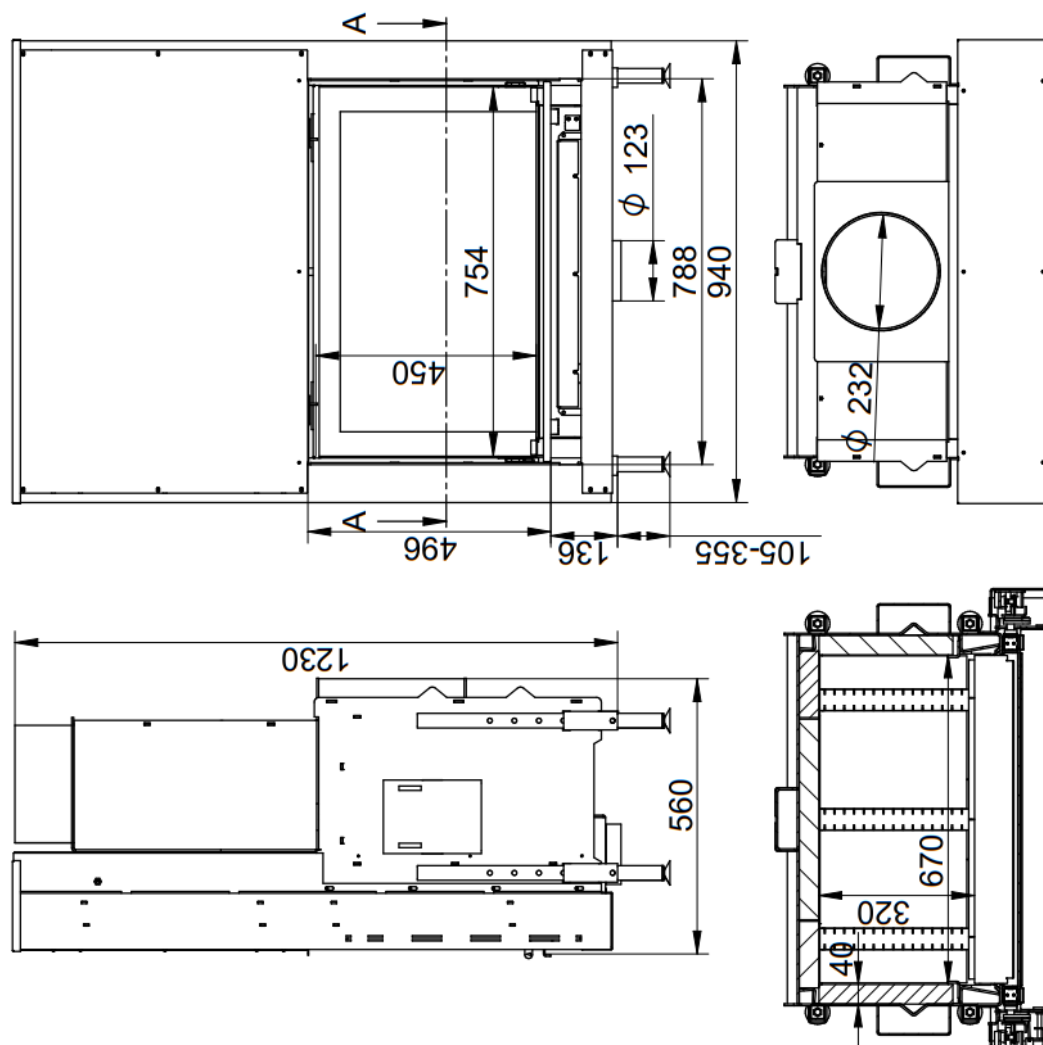

All dimensions are approximate

*direct air inlet - optional equipment