


Linea V1070	Technical data sheet
	Version 12/2024

HEATING & TECHNICAL PARAMETERS:		
energy efficiency class	A-B-C-D-E-F-G	A+
direct heat output (nominal power)	[kW]	11,8
heating power range	[kW]	6 - 13
energy efficiency index	[EEI]	109,9
energy efficiency at nominal heat output	[%]	82
seasonal space heating energy efficiency	[%]	72,00
CO emission at 13% O ₂	[%]	0,1
	[mg/Nm ³]	1233
dust emission at 13% O ₂	[mg/Nm ³]	15
OGC at 13% O ₂	[mg/Nm ³]	53
NO _x emission at 13% O ₂	[mg/Nm ³]	88
flue gas mass flow	[g/s]	9,56
average smoke temperature at smoke outlet	[°C]	217
minimum chimney draft	[Pa]	12
DIMENSIONS & WIGHT		
total dimensions, height x width x depth	[mm]	1805 x 640 x 560
fascade dimensions, width x height	[mm]	488 x 946
front glass dimensions, width x height	[mm]	454 x 900
maximum log lenght	[cm]	40
smoke flue diameter	[mm]	230 / 240
air inlet diameter	[mm]	123
weight	[kg]	310
CERTIFICATES AND NORMS		
EN 13229	V / -	221 / 19-LG
declaration of the Ecodesign requirements	V / -	V
BlmSchV level 2	V / -	V
15a BVG	V / -	
ADDITIONAL INFORMATION		
minimum cross-section of supply air grating	[cm ²]	590
minimum cross-section of outgoing air grating	[cm ²]	830
for continous burning	V / -	V
type of fuel		wood logs with moisture content ≤ 20 %
ashpan	V / -	V
appliance suitable for low energy and passive	V / -	V
door opening		up/down + side
possibility of burning with open door	V / -	V
warranty	years	5

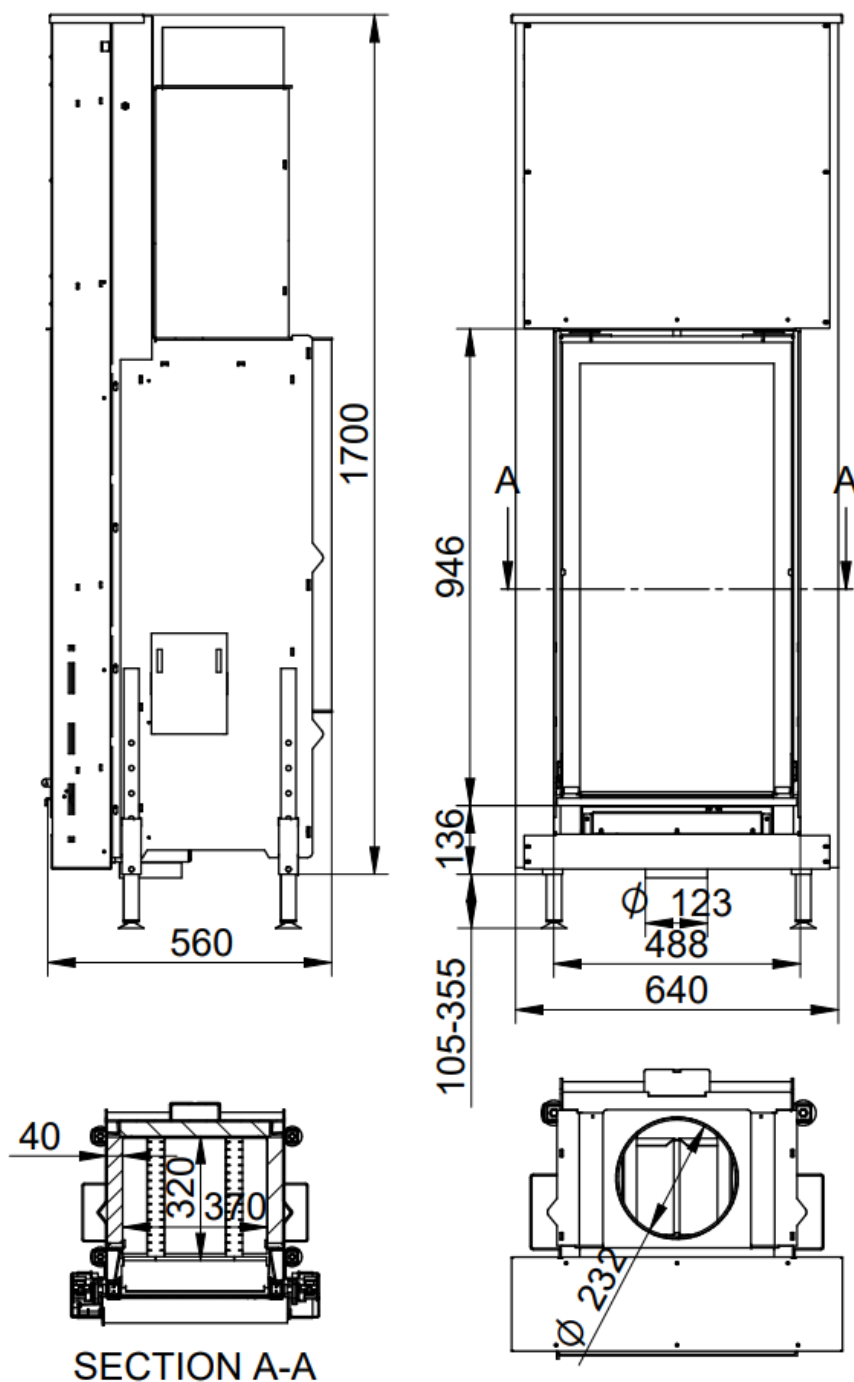

All dimensions are approximate
*direct air inlet - optional equipment