


Linea V1190	Technical data sheet	
	Version 12/2024	

HEATING & TECHNICAL PARAMETERS:		
energy efficiency class	A-B-C-D-E-F-G	A+
direct heat output (nominal power)	[kW]	16
heating power range	[kW]	8 - 18
energy efficiency index	[EEI]	107,1
energy efficiency at nominal heat output	[%]	80,1
seasonal space heating energy efficiency	[%]	70,1
CO emission at 13% O ₂	[%]	0,1
	[mg/Nm ³]	1242
dust emission at 13% O ₂	[mg/Nm ³]	17
OGC at 13% O ₂	[mg/Nm ³]	58
NO _x emission at 13% O ₂	[mg/Nm ³]	122
flue gas mass flow	[g/s]	17,65
average smoke temperature at smoke outlet	[°C]	228
minimum chimney draft	[Pa]	12
DIMENSIONS & WIGHT		
total dimensions, height x width x depth	[mm]	1700x1090x560
fascade dimensions, width x height	[mm]	938 x 744
front glass dimensions, width x height	[mm]	904 x 700
maximum log lenght	[cm]	80
smoke flue diameter	[mm]	230 / 240
air inlet diameter	[mm]	123
weight	[kg]	390
CERTIFICATES AND NORMS		
EN 13229	V / -	146 / 19-LG
declaration of the Ecodesign requirements	V / -	V
BlmSchV level 2	V / -	V
15a BVG	V / -	
ADDITIONAL INFORMATION		
minimum cross-section of supply air grating	[cm ²]	800
minimum cross-section of outgoing air grating	[cm ²]	1120
for continous burning	V / -	V
type of fuel		wood logs with moisture content ≤ 20 %
ashpan	V / -	V
appliance suitable for low energy and passive	V / -	V
door opening		up/down + side
possibility of burning with open door	V / -	V
warranty	years	5

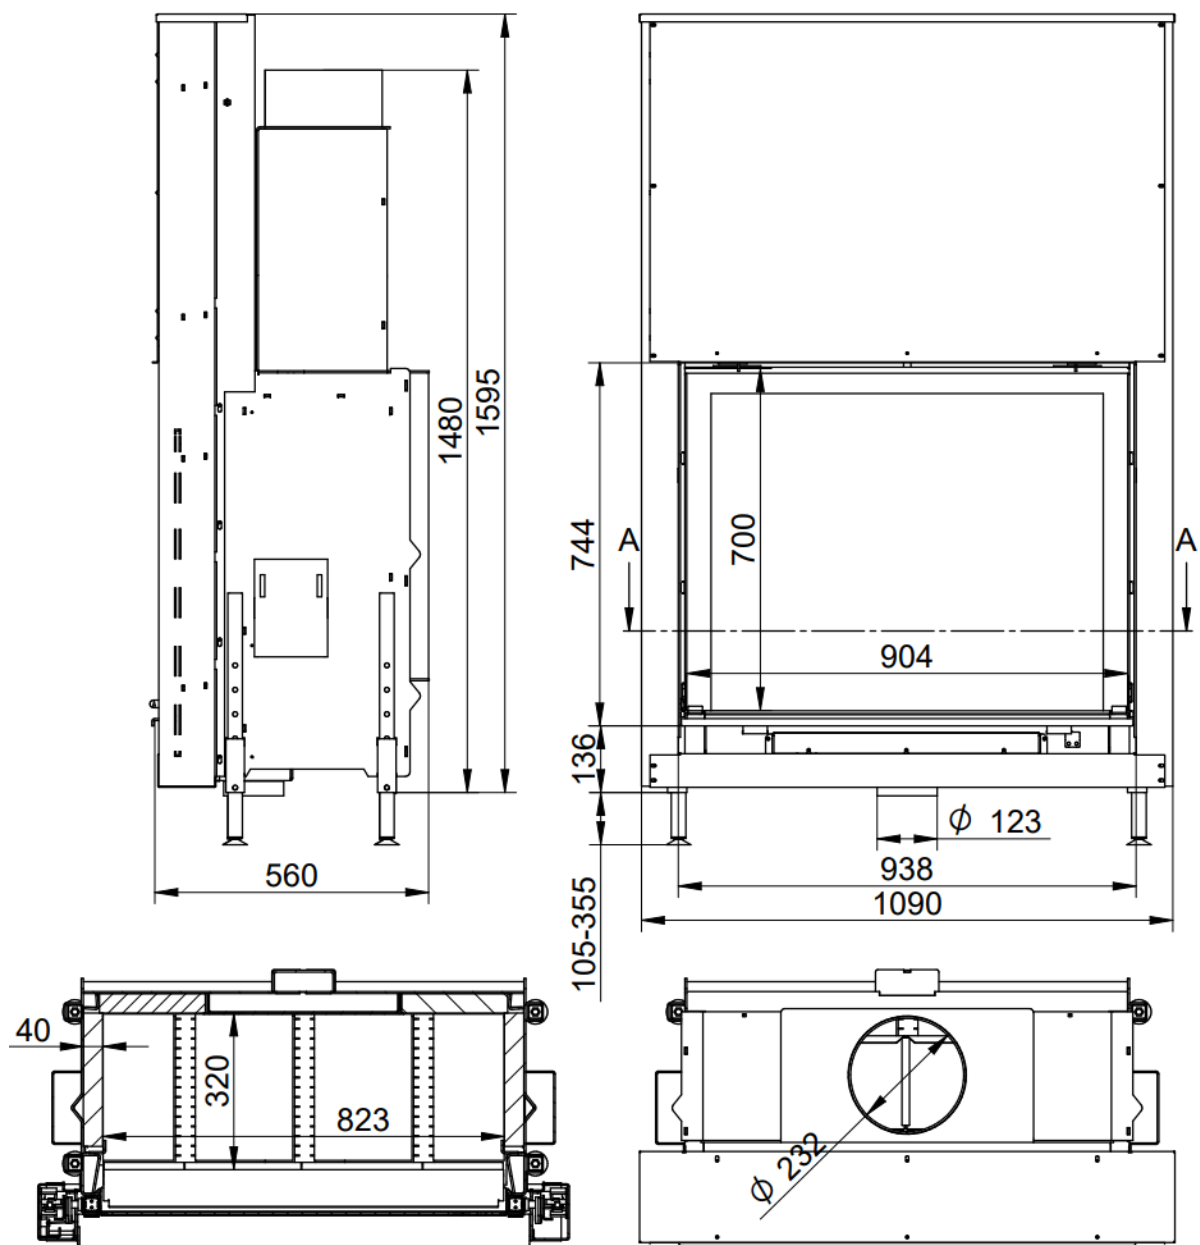

All dimensions are approximate

*direct air inlet - optional equipment