
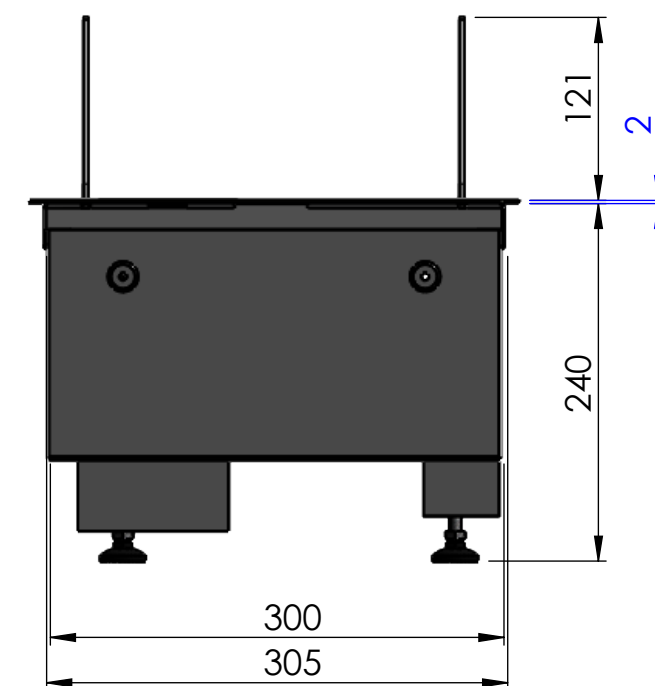
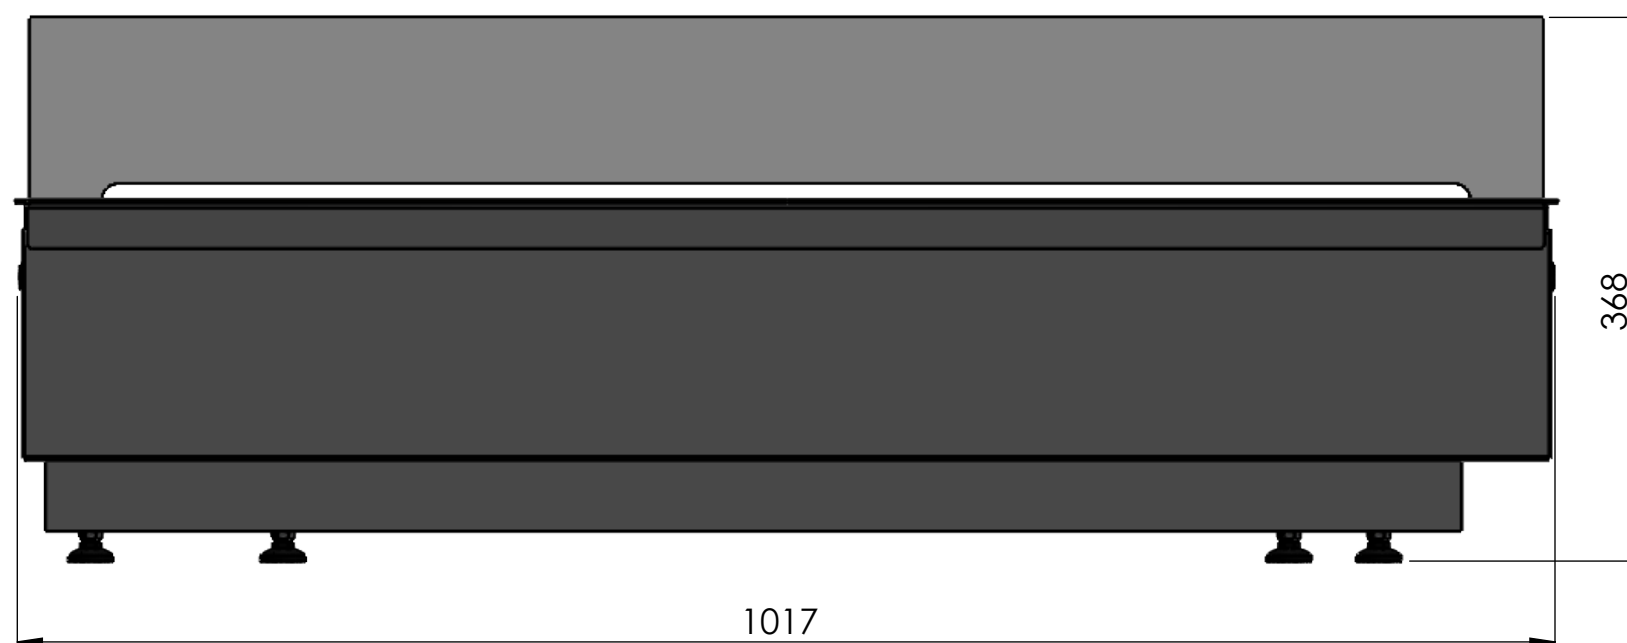


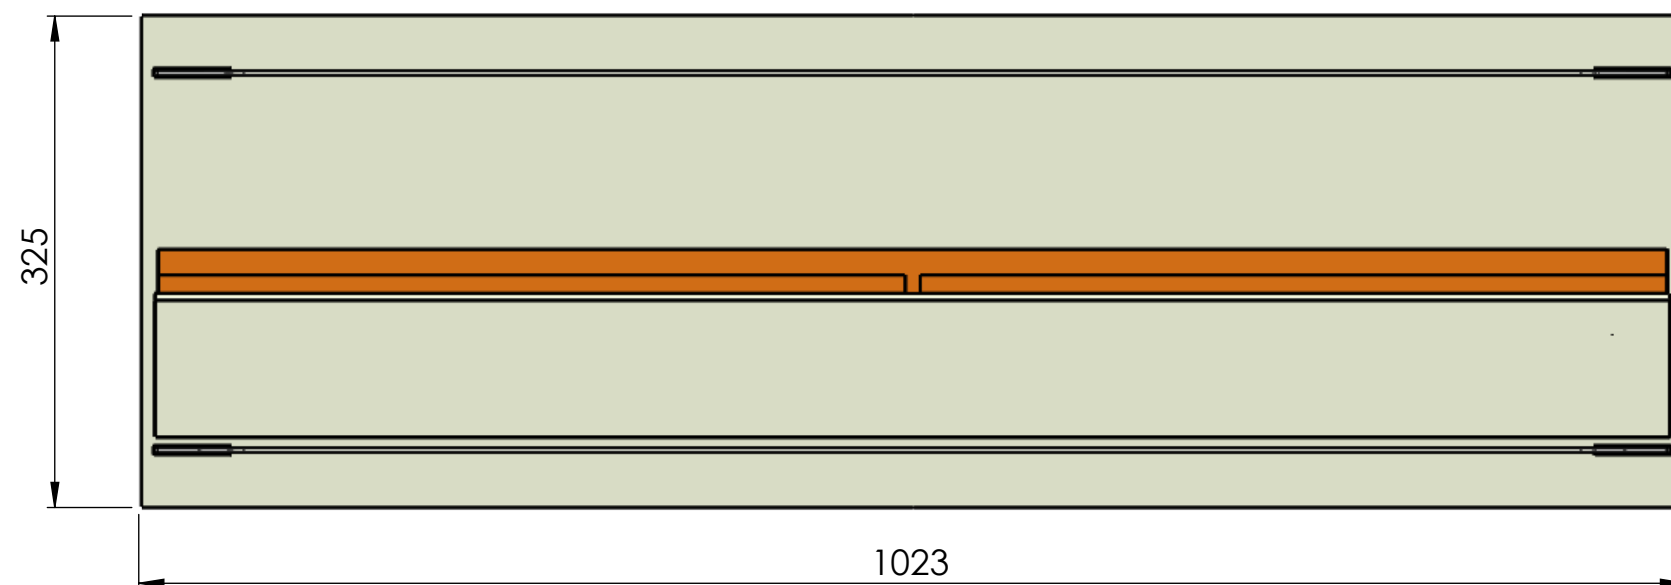

- standard topplate is Brushed stainless steel
- optional: topplate powdercoated black


Powersupply: 220-230 V

Power consumption: 450 -480 Watt



Water reservoir: 2x 2 litres

Running hours manual filling (tank: 6-8 hours)

Running hours automatic filling (main water): no restriction

Part Number: Mistero 1000		DESCRIPTION:		Metaalstraat 3a/3c 7483 PD Haaksbergen 0031 (0)53-5742554 0031 (0)53-5743453		safretti®	
General tol. $\pm$ 0,5mm General angle tol. $\pm$ 0,5° General flatness tol. 2mm per meter unless otherwise specified		Mistero		REVISION:		POS.NR:	
				MATERIAL:		Quantity:	
Weight:	Drawned: P. van den Berg		Am. Proj.	Scale: 1:10	Date: 30-10-2018	file-name.: Mistero 1000	Size: A3

Cutouts for air ventilation should be at least: 420 cm2 ((28x5cm)x3) for a Mistero 1000.
Create cutouts in bottom area.

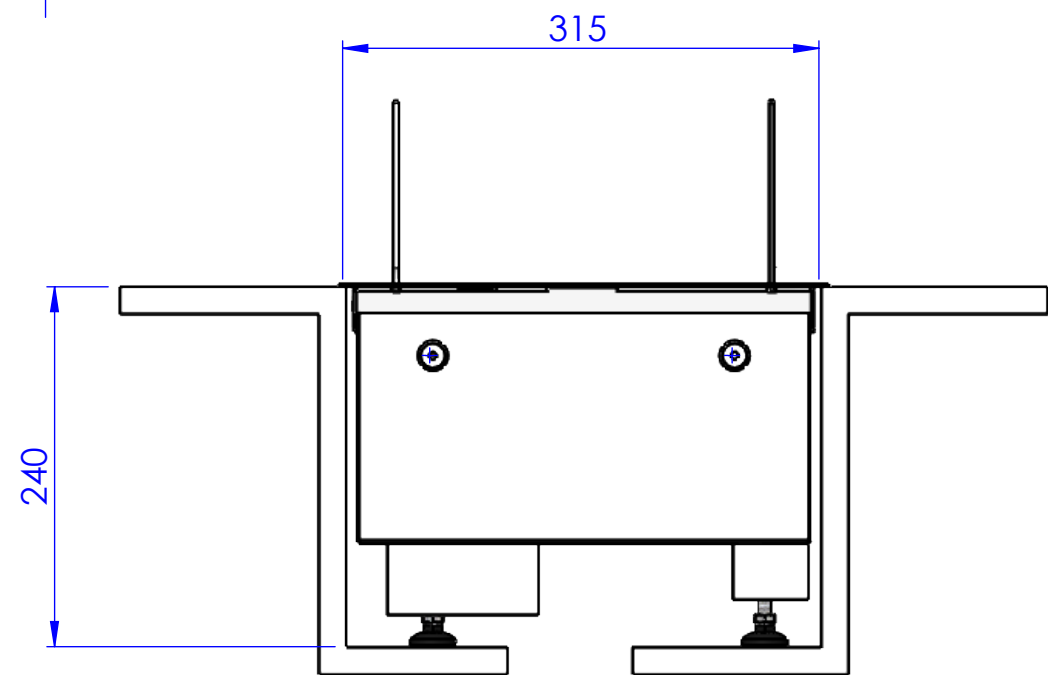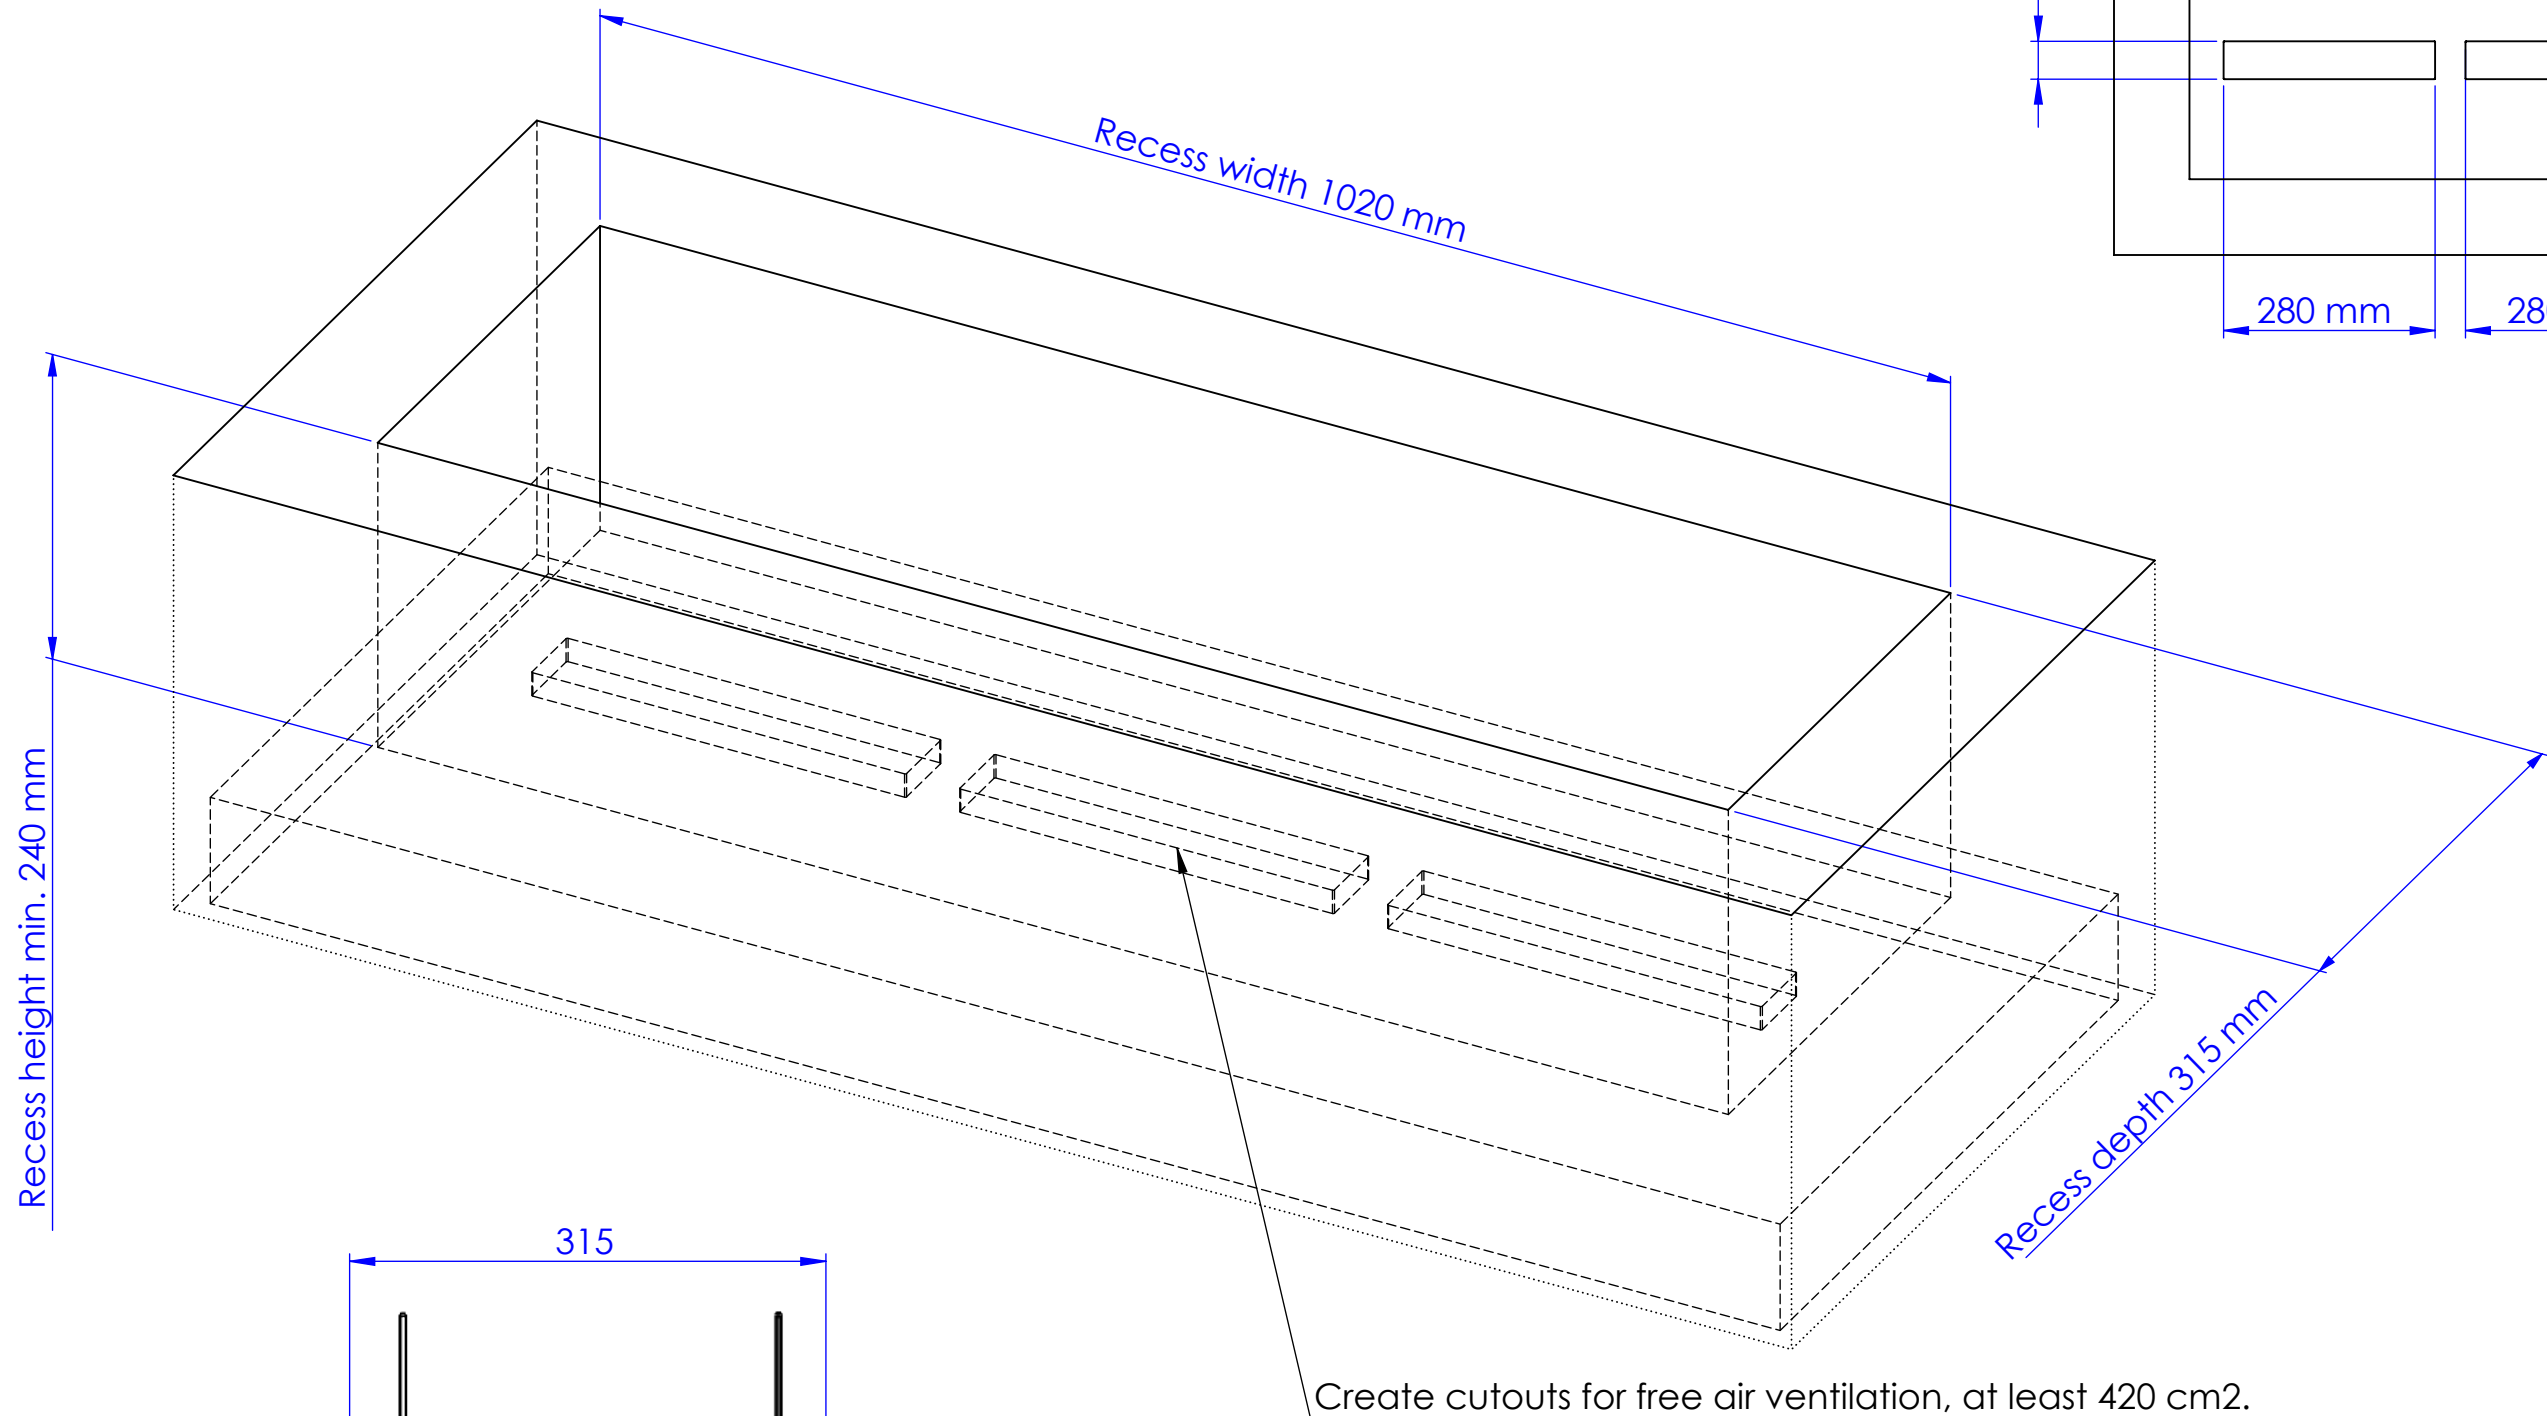

Part Number: Mistero 1000		DESCRIPTION:		Metaalstraat 3a/3c 7483 PD Haaksbergen 0031 (0)53-5742554 0031 (0)53-5743453		safretti®	
General tol. ± 0,5mm General angle tol. ± 0,5° General flatness tol. 2mm per meter unless otherwise specified		Cut-out dimensions		REVISION:		POS.NR:	
				MATERIAL:		Quantity:	
Weight:	Drawned: P. van den Berg	Am. Proj.	Scale: 1:10	Date: 30-10-2018	file-name.: Mistero 1000	Size: A3	