
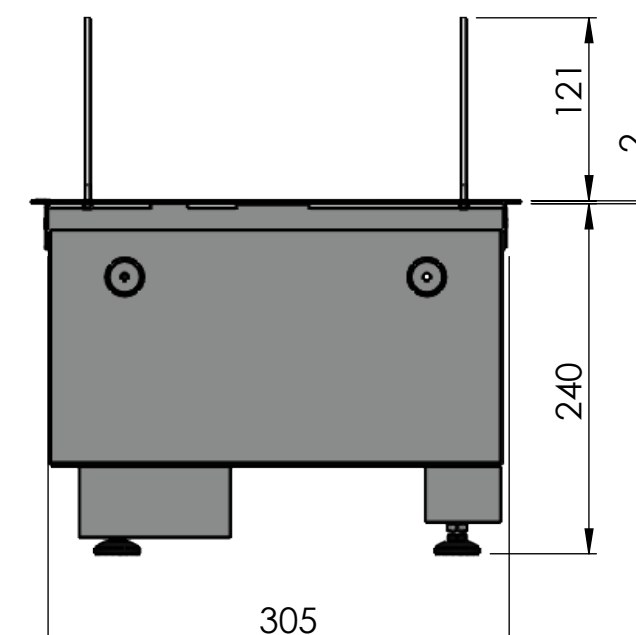
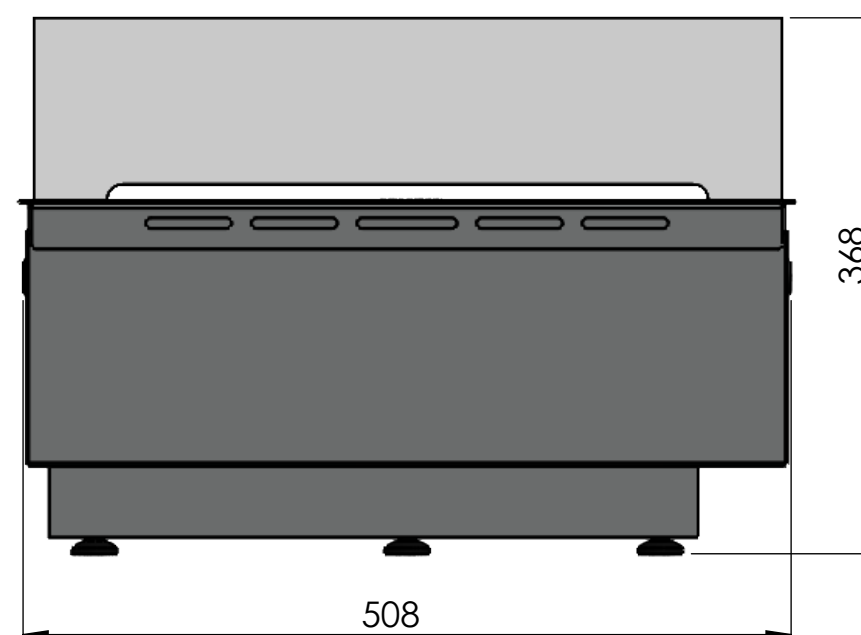


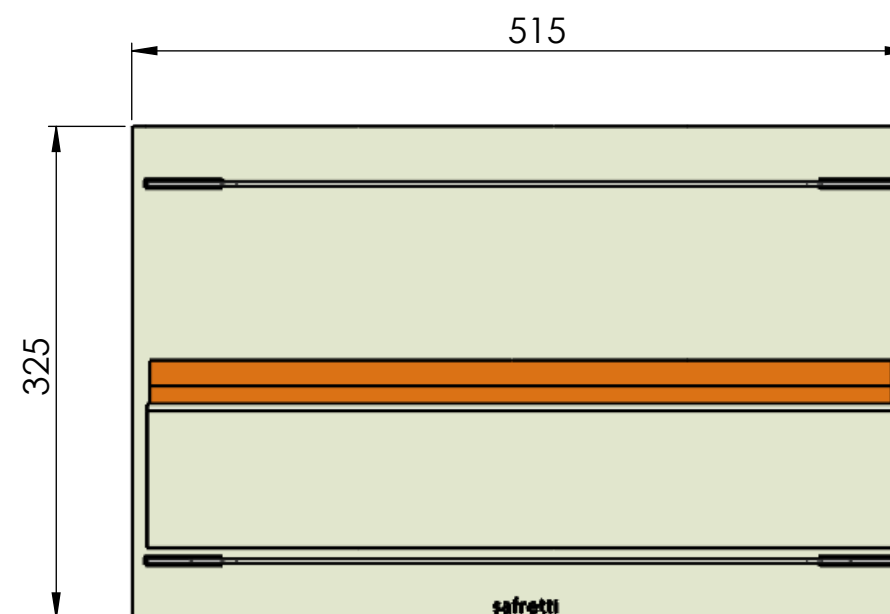

- standard topplate is Brushed stainless steel
- optional: topplate powdercoated black


Powersupply: 220-230 V


Power consumption: 225 -240 Watt

Water reservoir: 2 litres

Running hours manual filling (tank: 6-8 hours)

Running hours automatic filling (main water): no restriction

Part Number: Mistero 500		DESCRIPTION: Metaalstraat 3a/3c 7483 PD Haaksbergen 0031 (0)53-5742554 0031 (0)53-5743453			safretti®		
General tol. ± 0,5mm General angle tol. ± 0,5° General flatness tol. 2mm per meter unless otherwise specified		Mistero 500			REVISION:		POS.NR:
					MATERIAL:		Quantity:
Weight:	Drawned: P. van den Berg		Am. Proj.	Scale: 1:5	Date: 30-10-2018	file-name.: Mistero 500	Size: A3

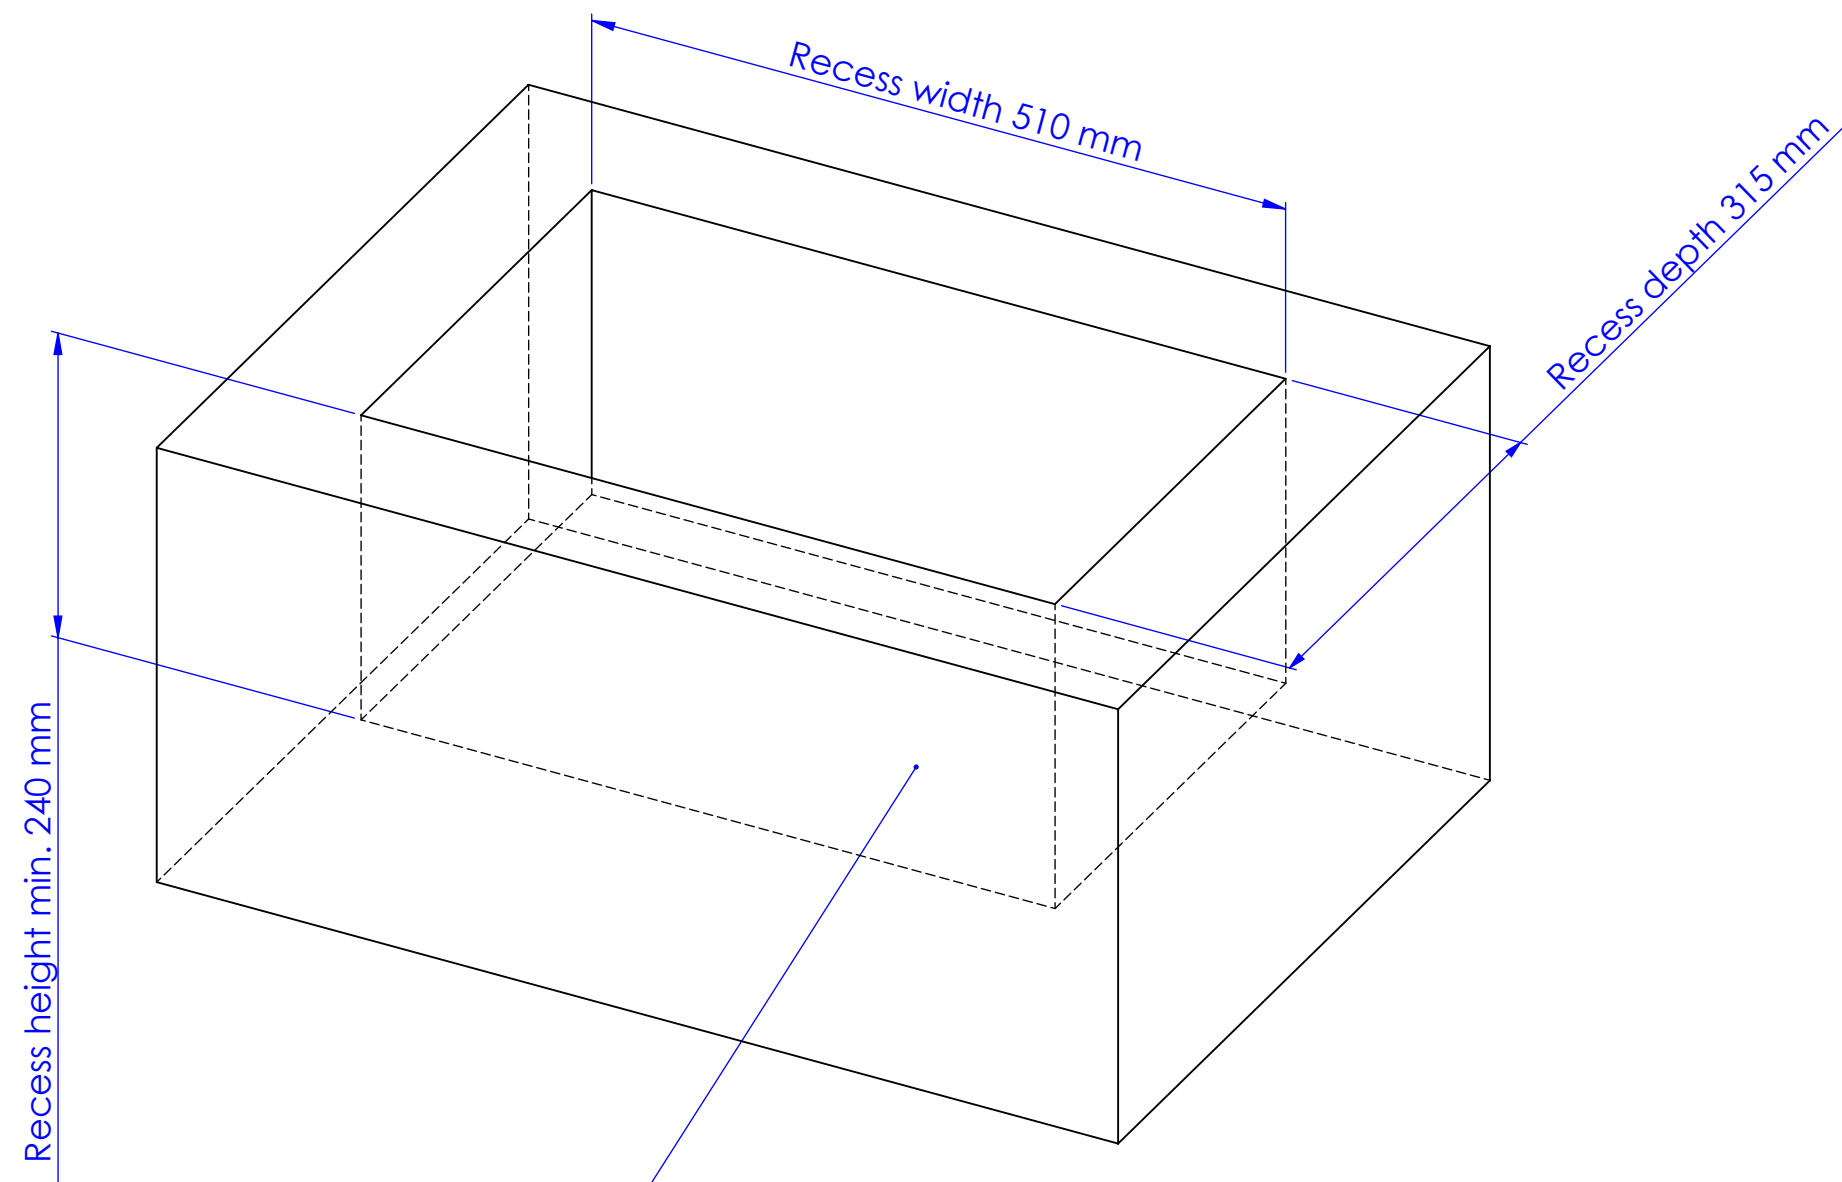

Create min. 4 holes of diameter 100 mm for air ventilation /power supply in any of the sidewalls of the recess area.

Air ventilation should be at least: 210 cm2 (21x10cm) for a Mistero 500.

Part Number: Mistero 500		DESCRIPTION:		Metaalstraat 3a/3c 7483 PD Haaksbergen 0031 (0)53-5742554 0031 (0)53-5743453		safretti®	
General tol. ± 0,5mm General angle tol. ± 0,5° General flatness tol. 2mm per meter unless otherwise specified		Cut-out dimensions		REVISION:		POS.NR:	
				MATERIAL:		Quantity:	
Weight:	Drawned: P. van den Berg		Am. Proj.	Scale: 1:5	Date: 30-10-2018	file-name.: Mistero 500	Size: A3